

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
12.11.2003 Bulletin 2003/46

(51) Int Cl.7: H04Q 7/38, H04Q 7/22

(21) Application number: 03016354.7

(22) Date of filing: 05.12.1996

<div>(84) Designated Contracting States: DE GB NL</div> <div>(30) Priority: 06.12.1995 US 568041</div> <div>(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC: 96119565.8 / 0 778 716</div> <div>(71) Applicant: AT&T Wireless Services, Inc. Kirkland, Washington 98033 (US)</div>	<div>(72) Inventor: Holmes, David William James Redmond, Washington (US)</div> <div>(74) Representative: Kuhnlen & Wacker Patent- und Rechtsanwaltsbüro, Prinz-Ludwig-Strasse 40A 85354 Freising (DE)</div> <div> <div>Remarks:</div> <div>This application was filed on 18 - 07 - 2003 as a divisional application to the application mentioned under INID code 62.</div> </div>
--	---


(54)

Costumer activation system for cellular network

(57)

A mobile communication terminal device such as a cellular telephone is provided with a preliminary identifier stored in memory. The identifier allows access to a cellular network for verification and provides essentially unique identification by the network, but is insufficient to allow further use of the network. During verification, the identifier is analyzed by a cellular network processor and a determination is made whether the cellular telephone should have restricted access to the network. Upon favorable completion of the identifier analysis, a signal may be transmitted to the cellular telephone that allows the cellular telephone to have less restricted access to the network.

FIG. 1

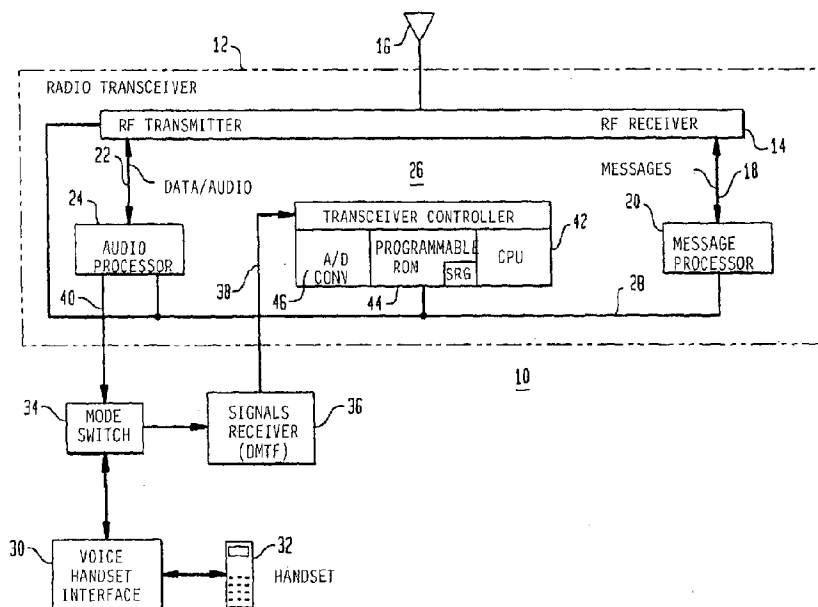

Description

Technical Field

[0001] The present invention relates in general to a data transmission system and a method which can be used to interface a cellular telephone with an activation computer for the programming of a cellular telephone.

Background Of the Invention

[0002] Cellular telephone use in the United States has dramatically increased over the past few years. When cellular telephones were first introduced, they were mainly large, vehicle installed units sold through specialty dealers and small shops specializing in the installation and activation of cellular telephones. In recent years, however, compact portable units have become commonplace and cellular service providers and other mass retailers have replaced the specialty dealers and installers as the preferred source of supply. Because these compact portable units are being sold in areas serviced by local carriers having different and sometimes conflicting activation requirements, they are typically received at the retailer's store without the information necessary for their activation. The information needed for activation is generally programmed, after purchase and authorization by the telephone carrier, into the cellular telephone in order to activate it. Typically, this information includes a telephone number or Mobile Station Identification (MSID) that is installed in the memory of the cellular telephone by the mass retailer. In most domestic systems, the MSID complies with a format designated as the MIN standard, which standard is defined in IS-136, EIA-553, and so on. In other systems, the MSID may be, for example, the international mobile station identification (IMSI) format as defined in ITU recommendation E.212. In any event, the local carrier also includes some information from the cellular telephone unit itself that identifies the particular cellular unit to the local carrier's equipment in order to effect the right service (protocol selection specific to the manufacturer of the cellular unit) and correct billing (call cost accounting).

[0003] Some cellular service providers have required that any prospective customer bring the cellular telephone unit, after purchasing it, to an authorized service center for activation. Because such a procedure is cumbersome and costly to the consumer, as well as to the provider (due to a delay in the service commencement date), other service providers have developed techniques for activating the telephone unit at the point of sale. Since mass retailers concentrate on selling the consumer a cellular telephone and, because the time of their sales personnel is most profitably spent on making as many sales to as many consumers as possible, the retailers prefer to minimize the time associated with activating each cellular telephone unit after the sale. Dis-

advantageously, activation of the cellular telephone unit is generally performed manually by the retailer's technician or even sales clerk, with the aid of a manual through the dial key pad of the cellular telephone.

[0004] A correct sequence of numbers and codes must be entered in order to program the cellular telephone. A small mistake can cause a failure of service, render the cellular unit inoperable or even damage it. In spite of the need for accuracy and knowledge in performing this activation process, many of the individuals charged with performing this process are either untrained or unfamiliar with the proper process. Currently, a significant percentage of the post-sale activation programming fails, causing the consumer to return to the place of purchase for reprogramming with not only unit downtime, but the inconvenience of having to return and spend time while the unit is once again programmed.

[0005] Recognizing the above mentioned deficiencies, it has been proposed in U.S. Pat. No. 5,297,191 entitled METHOD AND APPARATUS FOR REMOTELY PROGRAMMING A WIRELESS TELEPHONE SET and issued to I. Gerszberg on March 22, 1994, to provide a cellular telephone with a tone signals receiver to permit remote downloading of an assigned MSID into a read-only-memory circuit. This downloading is achieved, in one embodiment, by bridging the receiver onto an unblocked wireless voice communication channel established between the subscriber's set and a service representative, to thereby permit remote entry of subscriber-specific programming and wireless service authorization data into the subscriber's telephone set, as by a service representative or an automated activation computer. While this technique desirably relieves the sales representative of the task of programming the cellular telephone unit, it does involve the provision of a sufficient number of unblocked voice communication channels to accommodate the expected volume of new subscribers.

[0006] Accordingly, there exists a need for a method of programming wireless telephone sets in a manner that quickly, reliably, and cost effectively provides telephone service to new or existing customers.

Summary of the Invention

[0007] The foregoing need is met in an illustrative embodiment wherein a process of manufacturing a cellular telephone comprises the steps of assembling a memory, process, a receiver, and a transmitter, and storing in the memory an identifier. Essentially, the identifier allows access to a cellular network for verification and provides essentially unique identification by the network, but is insufficient to allow further use of the network.

[0008] A process of verification of a cellular telephone constructed in accordance with the illustrative process comprises the steps of receiving from the wireless telephone set an identifier that is transmitted at least in part on a cellular network and analyzing the transmitted identifier.

tifier to make a determination that the cellular telephone should have restricted access to the network. The verification process further includes, upon favorable completion of the determining step, a step of transmitting a signal to the cellular telephone, the signal transmitted allowing the cellular telephone to have less restricted access to the network.

[0009] The present invention not only greatly reduces the time required for programming or for activation, but it insures a correct exchange of activation programming information by automating the process, thus eliminating programming errors.

Brief Description of the Drawings

[0010] Other features and advantages of the present invention will be better understood by reference to the following detailed description and to the drawings, in which:

FIG. 1 is a block diagram schematically illustrating a mobile communications terminal device such, for example, as a cellular telephone, programmed with a preliminary identifier and other information needed to obtain restricted access to a cellular network in accordance with the present invention; and FIG. 2 is a flow chart depicting a method of evaluating a mobile communication terminal device such as the device depicted in FIG. 1 for less restricted access in accordance with the present invention;

Detailed Description

[0011] Referring to FIG. 1, there is shown, in functional block diagram form, a mobile communication terminal device which, for purposes of illustrative example only, is configured as a portable cellular telephone unit 10 with provisions for remote programming over a voice channel of a cellular telephone network. One such telephone unit is described in U.S. Pat. No. 5,297,191, the disclosure of which is expressly incorporated herein by reference.

[0012] As seen in FIG. 1, the cellular telephone unit 10, in one embodiment, comprises a radio transceiver portion 12 which includes a radio frequency receiver/transmitter 14 coupled to an antenna 16 and adapted to receive and transmit signals from and to a base station, e.g. a mobile cell site, or another wireless telephone. Coupled to the receiver/transmitter 14, via, for example, a bi-directional message connecting lead 18, is a processor 20 capable of receiving and processing system message-type signals. Also coupled to the receiver/transmitter 14, via, for example, another bi-directional lead 22, is a processor 24 adapted to process data signals as well as audio signals originating or received at the wireless telephone 10. Audio and data signals present on lead 22 are those signals intended for and derived from the antenna 16. Although two individual

processors 20 and 24 are shown and described in FIG. 1, it will be readily appreciated by those skilled in the art that a single processor may be configured to perform both sets of functions and that the illustrated configuration is presented for purposes of example only.

[0013] Within the radio transceiver 12, a controller 26 is coupled to the message processor 20 and the audio processor 24, via a control bus 28, which is also coupled to the receiver/transmitter 14. A voice handset interface circuit 30 interconnects the audio processor 24 and a telephone handset 32. In accordance with one illustrative embodiment, interposed between the voice handset interface 30 and the radio transceiver 12 is a mode switch 34, which in turn is coupled to a signals receiver 36. The latter is coupled via lead 38, to the transceiver controller 26. As will be explained in more detail later, the mode switch 34 diverts signals received at the antenna 16 and present on output lead 40 of the audio processor 24 to the signals receiver 36 during remote programming.

[0014] Signals receiver 36 may be selected among known commercially available receivers, such as, for example, the Hitachi HD404678 4-bit microprocessor with an integral DTMF receiver. In the case where the programming signals out of the audio processor 24 and present on lead 40 are in digital form, other similar expedients are employed. For example, the signals receiver 36 couples such digital signals to the controller 26 wherein an internal controller processing unit 42 directs such digital information for storage in a memory circuit within the controller 26, such, for example, as permanent read-only memory 44. Alternatively, if the programming information received at the antenna 16 is in the form of a sequence of tone signals, the receiver 36 (which in such case would be a tone signals receiver) would connect such signals to an analog-to-digital converter 46 such as that located within the controller 26. The digital output signals generated by the converter 46 would next be stored in the memory circuit 44 under the control of the processing unit 42.

[0015] Essentially all cellular telephone units shipped by a manufacturer contain, in memory as programmable memory circuit 44, identical test data, along with a serial number (hereinafter, referred to as ESN) unique to each respective unit. If desired, an external I/O connector to the I/O interface (not shown) of CPU 42 may be provided to facilitate individual programming of each terminal device. In this regard, however, it will be readily appreciated by those skilled in the art that the external I/O connector may be omitted if all factory programming of EEPROM 44 is to be performed prior to installation. In any event, CPU 42 is configured to receive and analyze ESN data and other test data fed to its I/O interface during initial factory programming, and thereafter to write the same in the storage region SRG of EEPROM 44.

[0016] As noted above, in conventional practice a mobile communication terminal device such as a cellular telephone unit 10 would typically be shipped from the

factory to the retailer's store without all of the information needed for access to a cellular network. Before the new unit can fully interact with a selected provider's network, sufficient information must be presented to the network to facilitate identification, authentication, and billing. In accordance with the present invention, the newly purchased cellular telephone unit or other mobile communication terminal device 10 is programmed with sufficient information to provide, at least initially, restricted access to such a network. Advantageously, this information may be programmed at the factory in an automated manner, making the resources of the mass retailer available for more productive use. of the present invention.

[0017] As noted above, essentially all cellular telephones shipped by a manufacturer contain, in memory, the same test data. This test data, which includes any activation information needed to obtain or simulate access to a cellular network during a trial operation at the factory, is eventually overwritten upon actual activation. It will therefore be readily apparent to those skilled in the art that all such telephones, if not programmed, will appear identical to the network upon their initial activation. As a result, an attempt to activate one such phone while another is being powered-up in the same vicinity may cause substantial difficulties during an on-air attempt to appropriately program either such telephone. In short, the network may either program them both, or be unable to complete such programming due to the apparent redundancy being encountered.

[0018] In accordance with the manufacturing process of the present invention, conflicts of the above mentioned type are avoided by inserting, at the factory or other convenient location, a preliminary or provisional identification into the memory of the mobile communications terminal device. Essentially, this preliminary identification is selected so as to provide identification to a particular device that is, in use, unlikely to cause a redundancy. By way of illustrative example, a cellular telephone manufacturer could use a series of 10,000 MSID numbers having, for example, a MIN, IMSI, or other format which may be used presently or adopted later, for insertion into the phones during manufacturing and repeat the sequence upon exhaustion. The resulting probability that two telephones resident in the same geographic area would have the same such identification (due to the repeated use of the same series of 10,000 numbers), is extremely small. Therefore, by use of a limiting identification number inserted into the phone upon manufacturing, previously unrecognized difficulties associated with on-air programming are obviated. By way of further illustrative example, the cellular telephone manufacturer may assign the aforementioned PMSID in a completely random manner. As in the previous example, the probability of two telephones becoming resident in the same geographic area and having the same such identification would be remote.

[0019] With reference now to FIG. 2, there is shown

a flow chart depicting a process of providing a mobile communication terminal device having a preliminary identifier with less restricted access to a selected provider's cellular network upon verification in accordance with an illustrative embodiment of the present invention. Upon the sale of a device as device 10 to a consumer (block 50), the retailer notifies the selected cellular service provider of the purchaser's identity, credit information -- if required by the provider at this time, as well as the ESN and preliminary MSID of the unit sold (block 52). Alternatively, the consumer may be requested to provide this information at the initial programming session, not at the point of sale.

[0020] The user seeks to utilize the cellular network for the first time by depressing the mode switch key (block 54). In response to the call signal, the ESN is sent to a base station as data together with the PMSID (Preliminary Mobile Station Identification) discussed above (block 56). In accordance with the illustrative embodiment of FIG. 2, the transmitted data is received at the base station and evaluated to determine whether coincidence is attained or not between the combination of the ESN and the PMSID and a previously registered corresponding combination (decision block 58). If so, the process proceeds from decision block 58 to decision block 60 for a determination of whether the PMSID and/or any other preliminary identifying information is compatible with the selected provider's network. If the PMSID or other preliminary identifying information is compatible with the selected provider's network, it may be retained (block 62). Otherwise an instruction is transmitted by the network provider to overwrite the PMSID data with an appropriate MSID newly assigned to the unit (block 64). Service authorization codes may, for example, be received from the service provider central computer (not shown) as channel tone signals that may be converted to authorization codes for storage in the memory of the telephone.

[0021] Regardless of the decision reached at block 60, less restricted access to the selected provider's network is now obtained by the new service customer (block 66). That is, the new customer is now able to complete a telephone call to a desired party using the cellular network of the service provider. If, however, no coincidence is discerned between the combination of the ESN and PMSID and previously stored customer data at block 58, the prospective consumer may be asked to provide information either by a live agent or by an automated voice prompt system (block 68) which may be accepted or rejected by the service provider network (block 70). In this regard, it should be noted that even if the ESN and PMSID do correspond to the stored customer data, it may be desirable to request certain information from the prospective consumer, for comparison to the stored customer data, to verify the caller's identity before passing operation of the process to block 60.

[0022] It should, of course, be noted that while the present invention has been described in reference to il-

lustrative embodiments, other arrangements may be apparent to those of ordinary skill in the art. For example, while the disclosed embodiments utilize discrete devices, these devices can be implemented using one or more appropriately programmed processors, special-purpose integrated circuits, digital processors, or an analog or hybrid counterpart of any of these devices.

Claims

1. A process of verifying a mobile communication terminal device, said process comprising:

receiving from the terminal device an identifier transmitted, at least in part, on a cellular network, the terminal device having restricted access to the network;
analyzing said identifier to determine whether the terminal device should continue to have restricted access to the network; and
transmitting, upon favorable completion of said analyzing step, a signal to the terminal device allowing the terminal device to have less restricted access to the network.

2. The process of claim 1, wherein the terminal device is a cellular telephone and wherein the identifier received during said receiving step includes first and second numbers, each of said first and second numbers being essentially unique to the cellular telephone.
3. The process of claim 2, wherein said first number is in mobile identification number (MIN) format.
4. The process of claim 1, wherein said analyzing step comprises accessing a customer data record associated with the identifier.
5. The process of claim 4, wherein said analyzing step further comprises transmitting signals representative of queries to the terminal device, the queries requesting a prospective consumer of cellular network services to provide data for comparison to data stored in said customer data record.
6. The process of claim 1, wherein the signal transmitted during said transmitting step is indicative of a replacement identifier for storage in a memory of said terminal device, said replacement identifier being recognized by the cellular network as entitled to said less restricted access.
7. The process of claim 6, wherein the signal transmitted during said transmitting step is further indicative of an instruction to overwrite said identifier with said replacement identifier.

8. A process for manufacturing a cellular telephone comprising the steps of:

assembling a memory, a processor, a receiver, and a transmitter; and
storing in said memory a preliminary identifier, said preliminary identifier defining a substantially unique identification and allowing initial access to a cellular network for verification but being insufficient to allow further use of said network.

FIG. 1


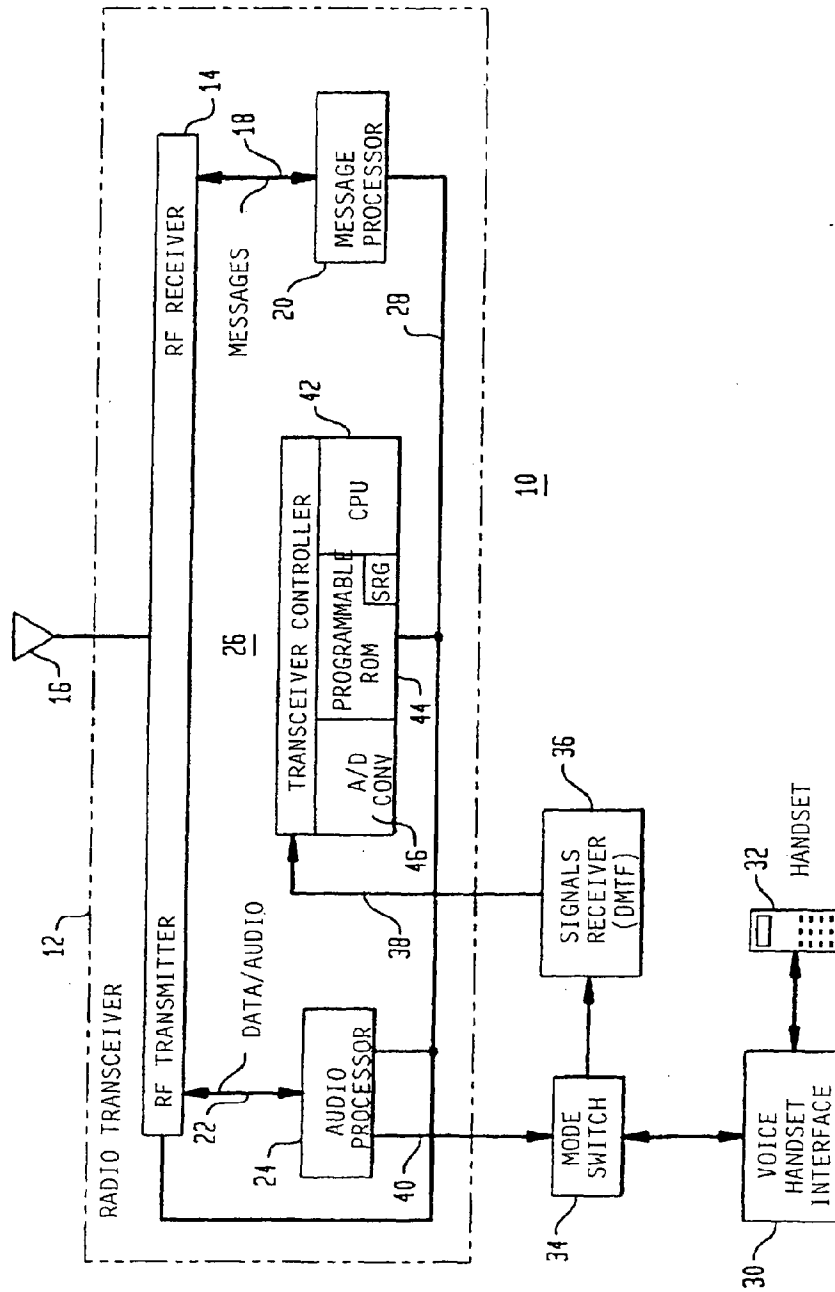


FIG. 2



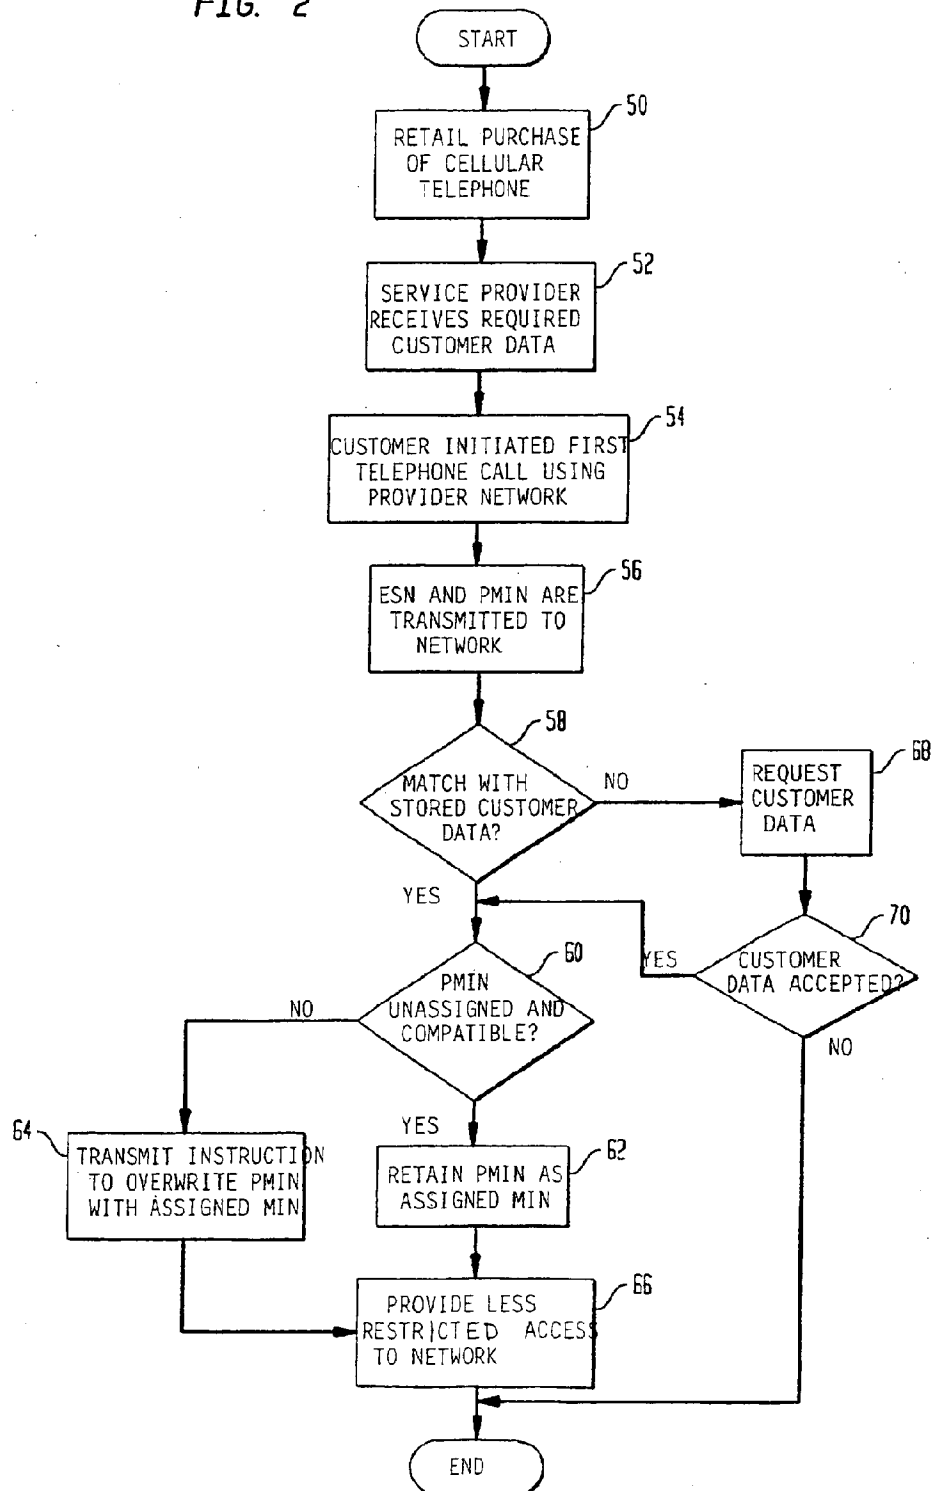

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 6354

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 077 790 A (D AMICO THOMAS V ET AL) 31 December 1991 (1991-12-31) * column 3, line 4 - column 4, line 24 * * claims 1,2,5-8 *	1,2,4,6,7	H04Q7/38 H04Q7/22
X	US 5 301 223 A (AMADON CHARLES G ET AL) 5 April 1994 (1994-04-05) * column 9, line 16 - column 11, line 24 * * column 18, line 61 - column 20, line 29 *	1-3 4-8	
A	* claims 1,3 *		
A,D	US 5 297 191 A (GERSZBERG IRWIN) 22 March 1994 (1994-03-22) * column 1, line 50 - column 2, line 20 * * column 3, line 16 - column 4, line 4 * * column 5, line 14 - line 30 * * claim 4 *	1-3,6-8	
X,P	WO 96 27270 A (ERICSSON GE MOBILE INC ;HENRY RAYMOND C JR (US); SICHER ALAN E (US) 6 September 1996 (1996-09-06) * page 3, line 12 - page 4, line 11 * * page 9, line 28 - page 10, line 20 * * page 12, line 1 - page 15, line 15 * * page 19, line 35 - page 20, line 10 * * claim 1 * * figures 3-5 *	1-4,6-8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 9 September 2003	Examiner Aguilar Cabarrus, E
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1500 (3.92 (Rev.01))

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 6354

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5077790	A	31-12-1991	AT 173119 T	15-11-1998
			AU 8769091 A	17-08-1992
			BR 9106726 A	29-06-1993
			CA 2087841 A1	01-07-1992
			DE 69130458 D1	10-12-1998
			EP 0565528 A1	20-10-1993
			FI 930307 A	26-01-1993
			JP 2546756 B2	23-10-1996
			JP 6505837 T	30-06-1994
			KR 9600935 B1	15-01-1996
			WO 9212584 A1	23-07-1992
			AU 649742 B2	02-06-1994
			NO 930352 A	02-02-1993
US 5301223	A	05-04-1994	AU 6716990 A	10-12-1991
			AU 7997291 A	10-12-1991
			CA 2083515 A1	23-11-1991
			WO 9118467 A1	28-11-1991
			WO 9118468 A1	28-11-1991
			US 5673306 A	30-09-1997
US 5297191	A	22-03-1994	US 5722084 A	24-02-1998
			CA 2045800 A1	29-03-1992
			DE 69124445 D1	13-03-1997
			DE 69124445 T2	26-06-1997
			EP 0478231 A2	01-04-1992
			ES 2096631 T3	16-03-1997
			JP 2801445 B2	21-09-1998
			JP 6284078 A	07-10-1994
WO 9627270	A	06-09-1996	US 5603084 A	11-02-1997
			AU 5300896 A	18-09-1996
			CA 2213464 A1	06-09-1996
			CN 1182522 A ,B	20-05-1998
			JP 11501179 T	26-01-1999
			WO 9627270 A1	06-09-1996

EPO FORM P0459

For more details about this annex, see Official Journal of the European Patent Office, No. 12/82